

509,916

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
16 October 2003 (16.10.2003)

PCT

(10) International Publication Number  
**WO 03/085472 A1**

- (51) International Patent Classification<sup>7</sup>: **G05D 1/02, H04B 5/00**
- (21) International Application Number: **PCT/NO03/00108**
- (22) International Filing Date: **3 April 2003 (03.04.2003)**
- (25) Filing Language: **Norwegian**
- (26) Publication Language: **English**
- (30) Priority Data:  
20021582 **4 April 2002 (04.04.2002)** **NO**
- (71) Applicant (for all designated States except US): **NATIONAL OILWELL NORWAY AS [NO/NO];** Lagerv. 8, N-4033 Stavanger (NO).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **RØED, Frode [NO/NO];** Sigurdsgt. 1, N-4010 Stavanger (NO). **SANDVIK, Sigve [NO/NO];** Ims, N-4308 Sandnes (NO).
- (74) Agent: **HÅMSØ PATENTBYRÅ ANS;** P.O. Box 171, N-4302 Sandnes (NO).
- (81) Designated States (national): **AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.**
- (84) Designated States (regional): **ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).**
- Published:  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **A METHOD AND A DEVICE FOR PROTECTION OF PERSONNEL**

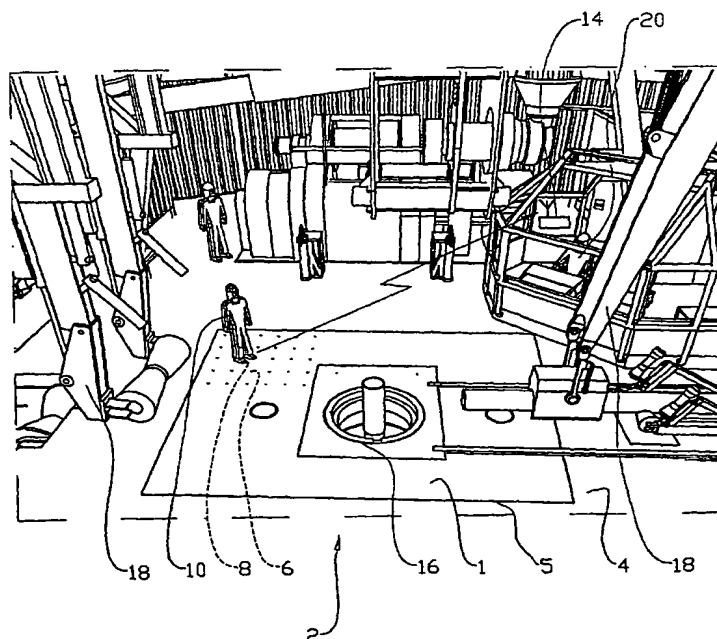

(57) Abstract: A method and a device for determining if or where a person (10) is located within an area (5), wherein a foot transceiver (8) connected to the person (10) activates one or several identifiable transponders (6) placed in the area (5), after which the activated transponder(s) (6) emit an identifiable signal, preferably via the foot transceiver (8), onto a main receiver/transmitter (14), each of the received signals then being referred to a known position.

BEST AVAILABLE COPY

WO 03/085472 A1

# A METHOD AND A DEVICE FOR PROTECTION OF PERSONNEL

This invention concerns a method of preventing people from becoming exposed to injury from tools and machines. More particularly, it concerns a method for determining if a person is located within the working range of the particular machine, thereby enabling the stopping of the machine prior to danger arising. The method is well suited for preventing personal injury from automatically controlled machines on a drill floor. This invention also concerns a device for practising the invention.

When using remotely controlled and/or automatically controlled machines, a person may be exposed to danger when located within the working range of the machine.

To overcome this danger, restricting the working range of the machine by means of, for example, a shield or a gate has commonly been used. It is also known to stop machines of this type by means of light rays being interrupted when a person enters the path of the light rays, or by means of a pressure-

sensitive mat providing a signal when a person steps onto the mat.

At larger, remotely controlled and/or automated installations, restricting the freedom of personnel movement by means of, for example, shields becomes impractical. This may be due to several machines operating within the same space and occasionally overlapping one another, and in such a way that shielding of one machine prevents another machine from performing an operation.

Under such conditions it may also be impractical to use a light-based device, inasmuch as the light used for detecting personnel inadvertently may be interrupted by machines in the area, or by the device being soiled. On a drill floor, such as that known from petroleum activities, several cooperating machines are being moved and are operating, for example, at the rotary table of the drill floor.

Current and prospective regulations concerning work near automated machines establish requirements for protection of areas at which machines of this type operate.

The object of the invention is to remedy the disadvantages of the prior art.

According to the invention, the object is achieved by means of the features disclosed in the specification below and in the subsequent patent claims.

In order to determine if and where a person is located within an area, a foot transceiver connected to a person activates

one or several identifiable transponders placed in the area, after which the activated transponders emit an identifiable signal, preferably via the foot transceiver, onto a main receiver/transmitter. Each received signal then may be referred to a known position.

For example, the foot transceiver may be placed in the person's shoe sole or at another suitable place on the body. In a preferred embodiment, the foot transceiver is of a type that may be charged inductively, thereby not requiring external connection. The foot transceiver is configured to transmit/receive magnetic and/or electromagnetic signals, and the foot transceiver may be configured to be "sleeping", but it is "woken up" by means of, for example, a signal from the main receiver/transmitter.

Transponders are placed in the area of interest, and preferably at a relatively small mutual distance. A distance of 10-20 centimetres has proven practical, and advantageously the transponders, which preferably are of a type without wire connections, may be imbedded in a floor coating.

As compared to the distance between transponders, the transmitter operates within a small range. Thus, one to four transponders will normally be active simultaneously while a person walks across a floor.

When a foot transceiver enters within a predetermined distance of a transponder, the transponder is activated by means of energy from the foot transceiver. The transponder transmits a code to the foot transceiver, which forwards the code in a recognizable format to the main receiver/

transmitter. The code is identifiable, enabling thus to determine which transponder is activated. Each transponder position is known, and thus it becomes relatively simple to determine where the foot transceiver, hence the person, is located.

By linking information concerning the person's whereabouts to the control system of a machine, the machine may be stopped when the person is located within a zone of danger.

It may prove appropriate to coordinate the method according to the invention with, for example, a photocell or a movement detector placed at the entrance of the area of interest, whereby a warning will be provided, or possibly that the machine is stopped if a person not provided with a foot transceiver enters the area.

Transponders preferably are configured in a manner allowing reprogramming of a transponder's signal code by means of a signal coming from the main receiver/transmitter.

Determination of position according to the method is not significantly disturbed by machine movements or by irrelevant signals. At the same time, the method is simple and reliable.

Hereinafter a non-limiting example of a preferred embodiment is described and being illustrated in the accompanying drawing, where:

Fig. 1 shows a perspective sketch of a drill floor on which a person is located within a supervised area;

Fig. 2 shows in a larger scale a section of Fig. 1; and

Fig. 3 shows a flow chart of the method according to the invention.

On the drawings the reference numeral 1 denotes a floor  
5 coating formed as a mat placed on the floor 4 of the drill floor 2.

A number of transponders 6 of known type are embedded in the floor coating 1 at a suitable, mutual distance, the transponders 6 being provided with a receiver component, a  
10 signal-generating component and a transmitter component. The energy required to emit a signal from the transponder 6 is provided by a foot transceiver 8 placed in a shoe sole 12 of a person 10.

Besides an accumulator, the foot transceiver 8, also of known  
15 configuration, is provided with a circuit for generating a magnetic and/or electromagnet field and a circuit for receiving such signals. The foot transceiver 8 is configured for inductive charging and thus may be closely embedded in the shoe sole 12.

20 When the person 10 is located within a predetermined distance of one of the transponders 6, the foot transceiver 8 activates the transponder 6, the transponder 6 thereby transmitting an identifiable signal back to the foot transceiver 8, which forwards the signal onto a main  
25 receiver/transmitter 14.

The position of each individual transponder 6 is known, and when the transponder 6 of interest transmits its identifiable signal via the foot transceiver 8 and the main receiver/transmitter 14 refers the signal to the current position, the position of the person 10 may be determined, generally by means of several transponders 6 activated simultaneously.

On a drill floor 2 the floor coating 1 containing the transponders 6 is placed on the floor 4 within an area 5 at the drill floor rotary table 16, and in such a way that it also covers the working range of the pipe handling machines 18 of interest.

When a person 10 enters onto the floor coating 1, cf. Fig. 1, the transponders 6 will be activated by the foot transceiver 8 placed in the shoe sole 12 of the person 10, cf. Fig. 2.

The one or several transponders 6 transmit(s) its/their identifiable signal(s) via the foot transceiver 8 and onto the main receiver/transmitter 14, whereupon the transponder(s) 6 being activated may be determined. The positions of the individual transponders 6 are known. Thus the position of the person 10 on the drill floor 2 also is known. An operator 20 may receive an overview of the position(s) of person(s) 10 on the drill floor 2 via, for example, a screen. The control system of the pipe handling machines 18 may be provided with information concerning the position of the person 10, and, for example, be programmed to stop if the person 10 enters the working range of the machine 18.

The method also is well suited for determining the position of other objects than persons.

## C l a i m s

1. A method for determining if or where a person (10) is located within an area (5), characterised in that a foot transceiver (8) connected to the person  
5 (10) activates one or several identifiable transponders (6) placed in the area (5), after which the activated transponder(s) (6) emit an identifiable signal, preferably via the foot transceiver (8), onto a main receiver/transmitter (14), each of the received signals  
10 then being referred to a known position.
2. A method according to claim 1, characterised in that an operator (20) is shown positions of persons (10) located on, for example, a drill floor (2), by means of, for example, a screen picture.
- 15 3. A method according to one or several of the preceding claims, characterised in that a machine (18) stops if a person (10) is located within the working range of the machine (18).
4. A device for determining if or where a person (10) is  
20 located within an area (5), characterised in that at least one transponder (6) being configured to emit an identifiable signal is placed in an area (5), the transponder (6) being configured to be activated by a foot transceiver (8) connected to the person (10).
- 25 5. A device according to claim 4, characterised in that a main receiver/transmitter (14) is configured



to receive and to refer a signal from a transponder (6)  
to the position of the transponder (6).

- 5 6. A device according to one or several of the preceding  
claims 4 and 5, c h a r a c t e r i s e d i n that the  
foot transceiver (8) is placed in the shoe sole (12) of  
the person (10).
- 10 7. A device according to one or several of the preceding  
claims 4 and 5, c h a r a c t e r i s e d i n that the  
foot transceiver (8) is placed at the ankle of the person  
(10).

1/3

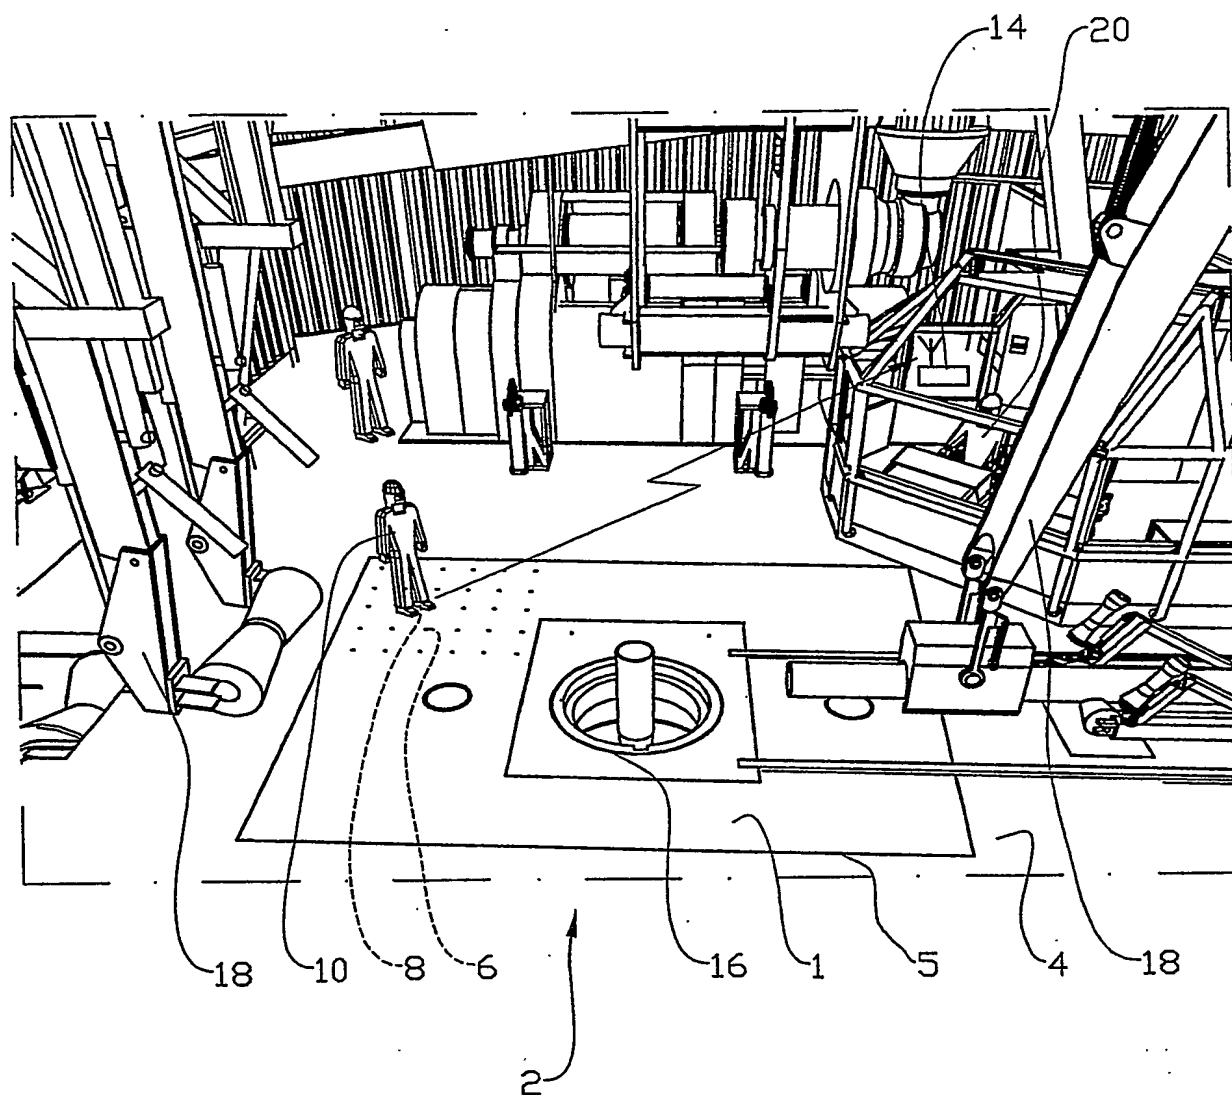


Fig. 1

2/3

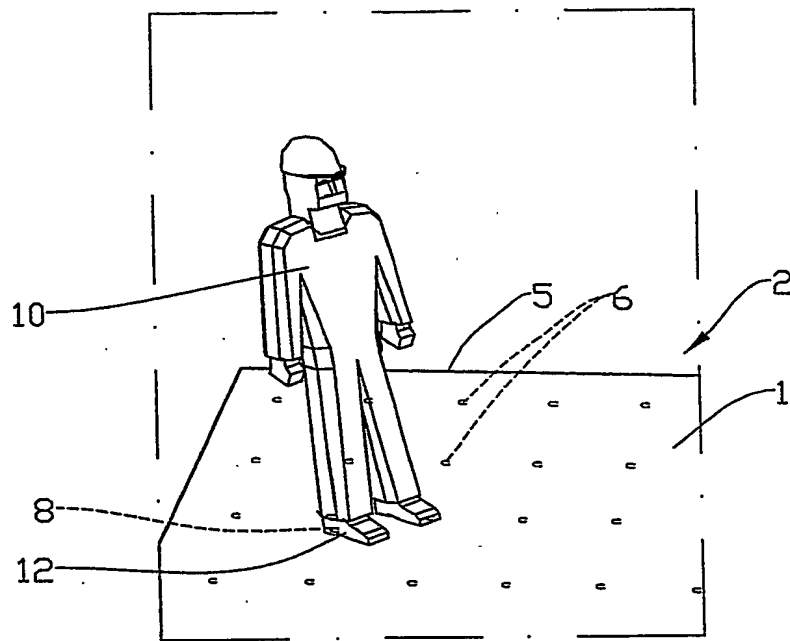


Fig. 2

3/3

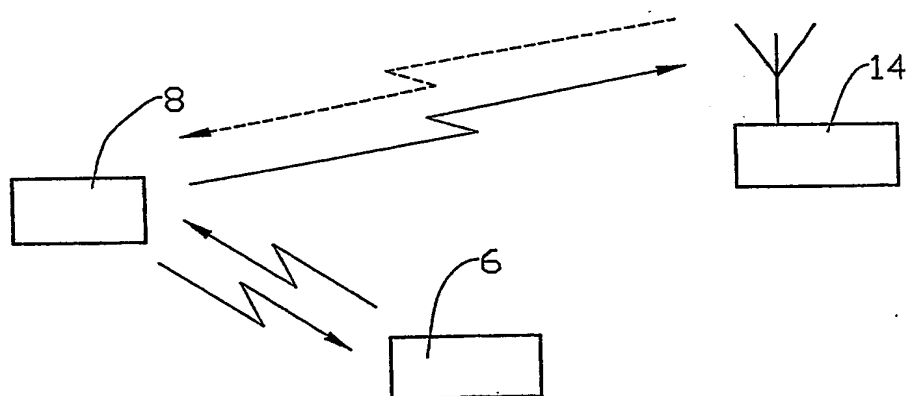


Fig. 3

## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/NO 03/00108

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: G05D 1/02, H04B 5/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: G05D, G08B, G01S, H04B, A63B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPI-INTERNAL, WPI DATA, PAJ, INSPEC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 9826517 A1 (MICHOT, GERARD), 18 June 1998 (18.06.98), page 3, line 29 - page 6, line 7, abstract  --	1-7
X	US 5513854 A (GIL J.G. DAVER), 7 May 1996 (07.05.96), column 4, line 28 - column 5, line 17, claim 1  --	1-7
X	US 5225809 A (CHARLES G. BUNN), 6 July 1993 (06.07.93), column 4, line 20 - column 5, line 22  --	1-7
A	WO 9838554 A1 (SIEMENS AKTIENGESSELLSCHAFT), 3 Sept 1998 (03.09.98), abstract  --	1-7

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

26 June 2003

Date of mailing of the international search report

30 -06- 2003

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Gordana Ninkovic/mj

Telephone No. +46 8 782 25 00

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DATABASE WPI Week 198825 Derwent Publications Ltd., London, GB Class S05, AN 1988-170531 & JP 63 107235 A ((NIDE) NEC CORP) 15 May 1988 (1988-05-12) abstact  --	1-7
A	FR 2382886 A1 (COCHARD EMMANUEL), 6 October 1978 (06.10.78), page 3, line 12 - page 4, line 12  --	1-7
A	DATABASE WPI Week 199529 Derwent Publications Ltd., London, GB Class S05, AN 1995-219511 & JP 71 31392 A ((FUIT) FUJITSU LTD), 19 May 1995 (1995-05-19) abstract  --	1-7
A	US 4025922 A (JAMES C. TRAWICK, III), 24 May 1977 (24.05.77), abstract  --	1-7
A	DATABASE WPI Week 200206 Derwent Publications Ltd., London, GB Class P32, AN 2001-187533 & JP 3245130B2 ((MIRA-N) MIRAI GIJUTSU KENKYUSHO KK) 7 January 2002 (2002-01-07) abstract  --	1-7
A	GB 1543910 A (THE PLESSEY COMPANY LIMITED), 11 April 1979 (11.04.79), page 2, line 34 - line 69  -- -----	1-7

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

02/06/03

International Application No.  
PCT/NO 03/00108

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
WO	9826517	A1	18/06/98	FR 2756957 A,B	12/06/98
US	5513854	A	07/05/96	NONE	
US	5225809	A	06/07/93	NONE	
WO	9838554	A1	03/09/98	AU 7204098 A DE 19709847 A EP 0965073 A	18/09/98 03/09/98 22/12/99
FR	2382886	A1	06/10/78	NONE	
US	4025922	A	24/05/77	NONE	
GB	1543910	A	11/04/79	NONE	